


注意事项:


1. 安装前请仔细阅读说明书;
2. 请专业电工安装;
3. 为避免触电危险, 在安装、维护前请确认关闭电源;
4. 保留说明书, 以备使用参考。

安装步骤:

1、地面安装

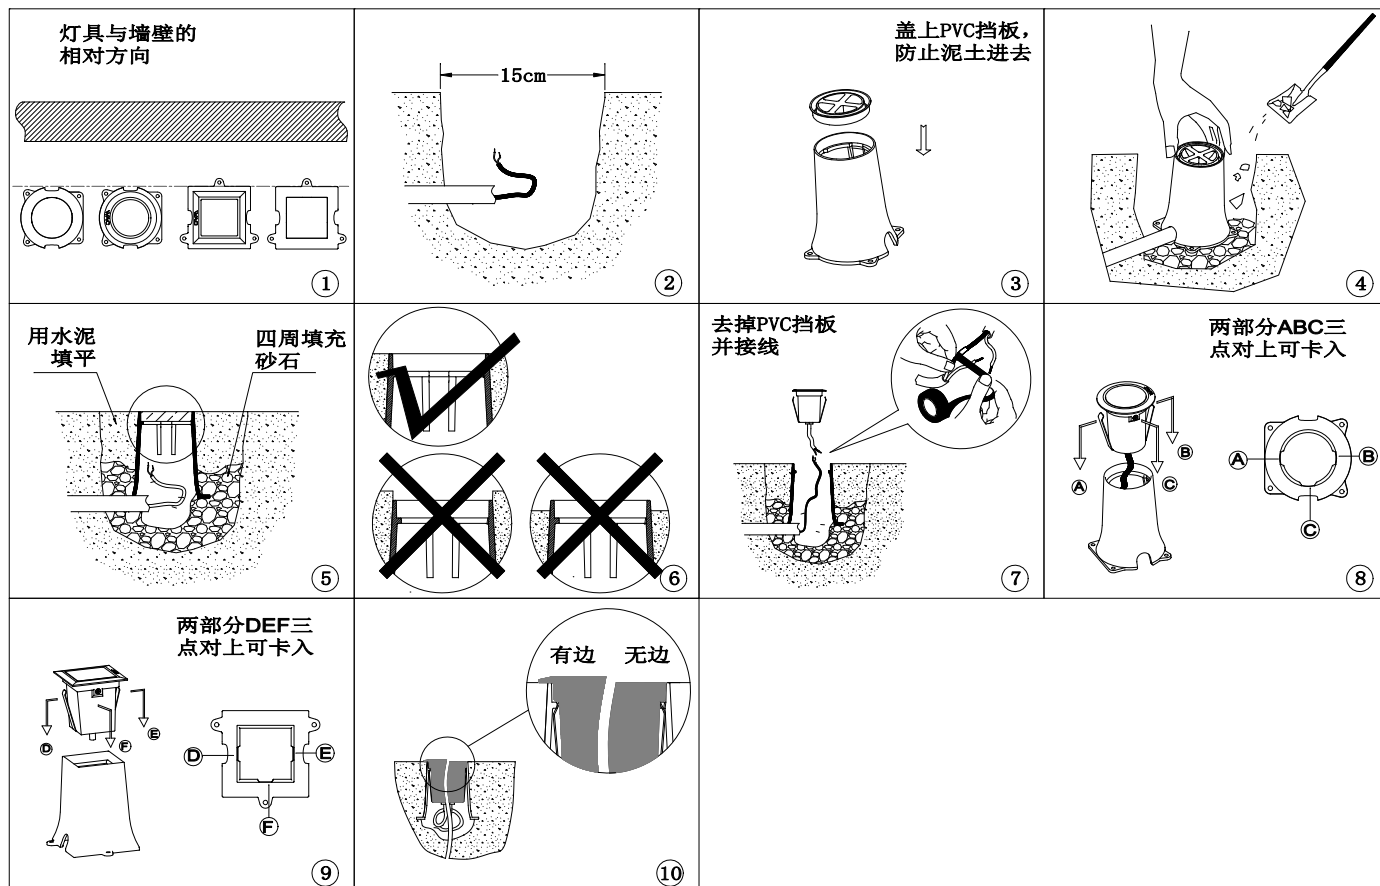

2、嵌入式安装（此安装方式不适合无边地埋灯）

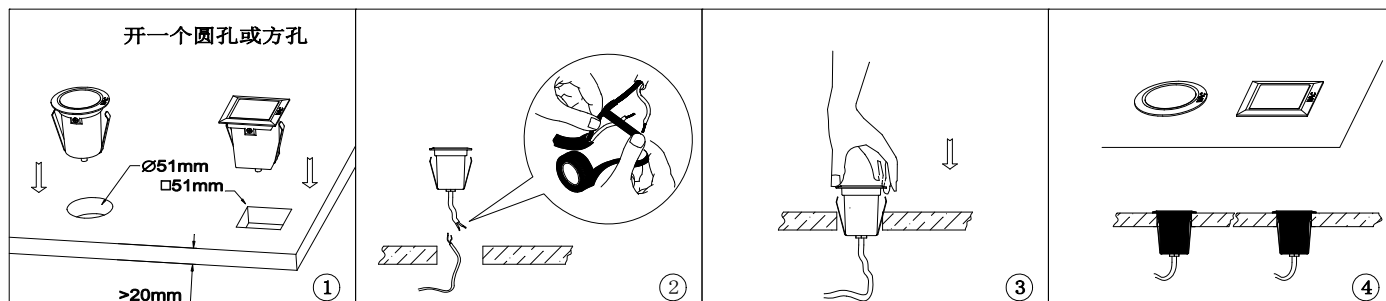


Safety Instructions:

To reduce the risk of fire, electrical shock and injuries to persons:


1. Read all instructions before installing.
2. Turn off power at main switch before installing or modifying the system.
3. A qualified electrician must install fixture only.
4. Retain instruction for future maintenance reference.

Mounting:


1. Concrete installation

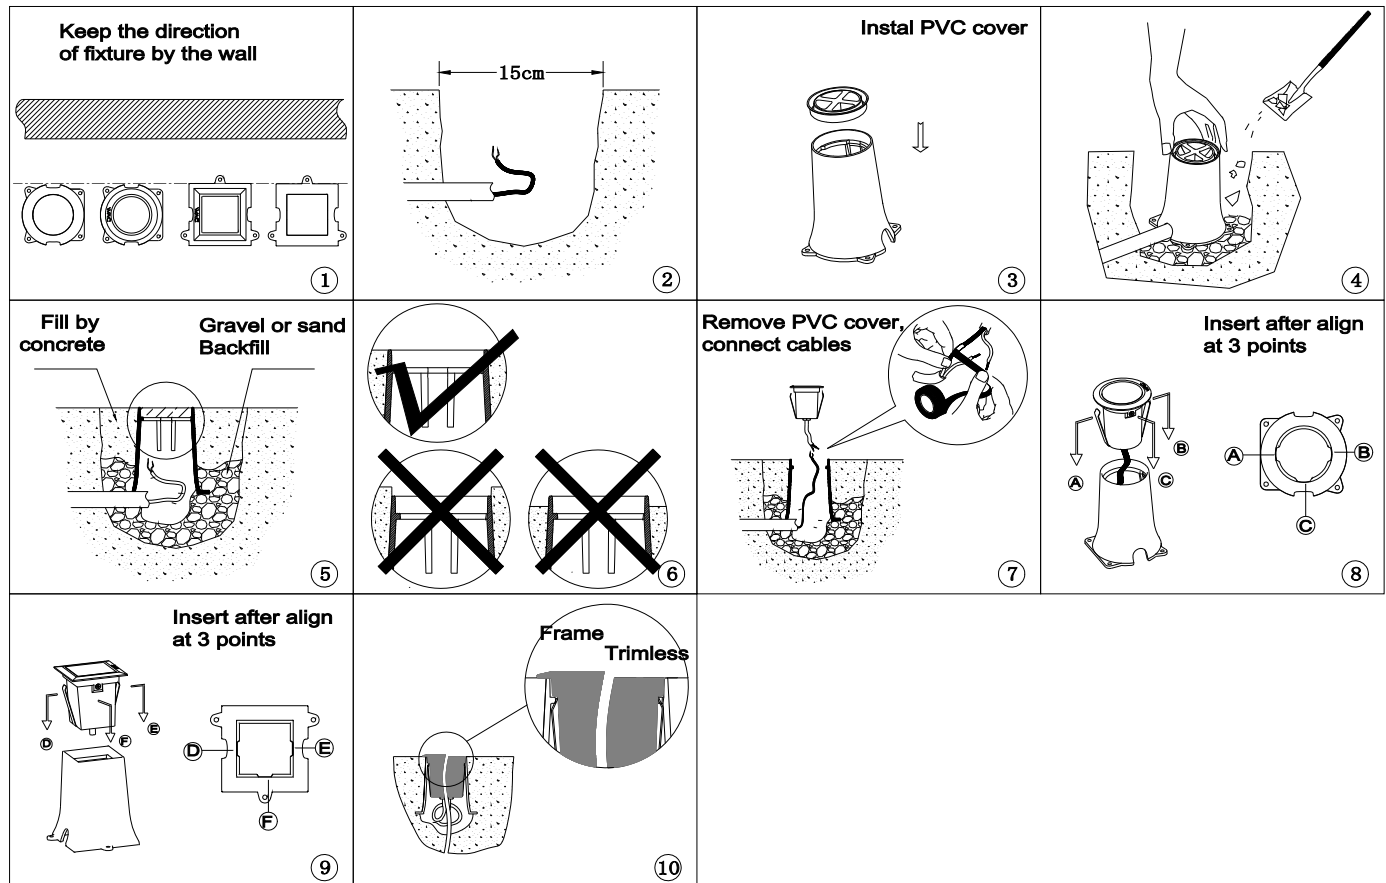


2. Recessed (Not suitable for the trimless fixture)

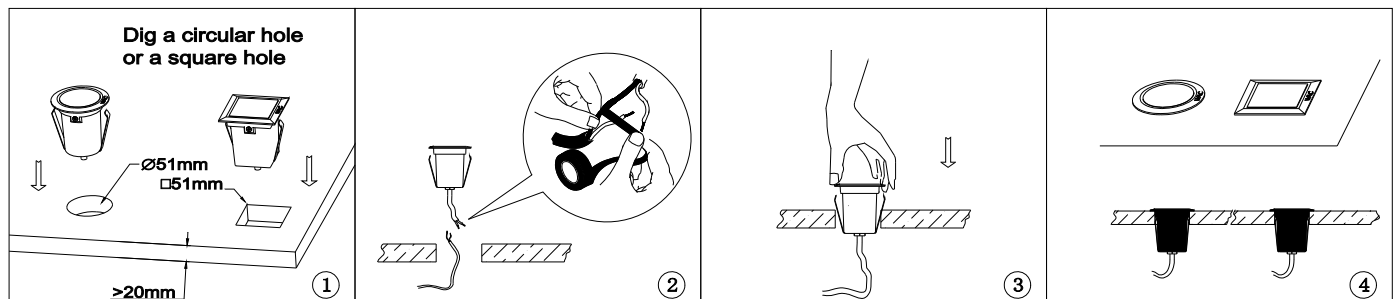

3、拆卸维修

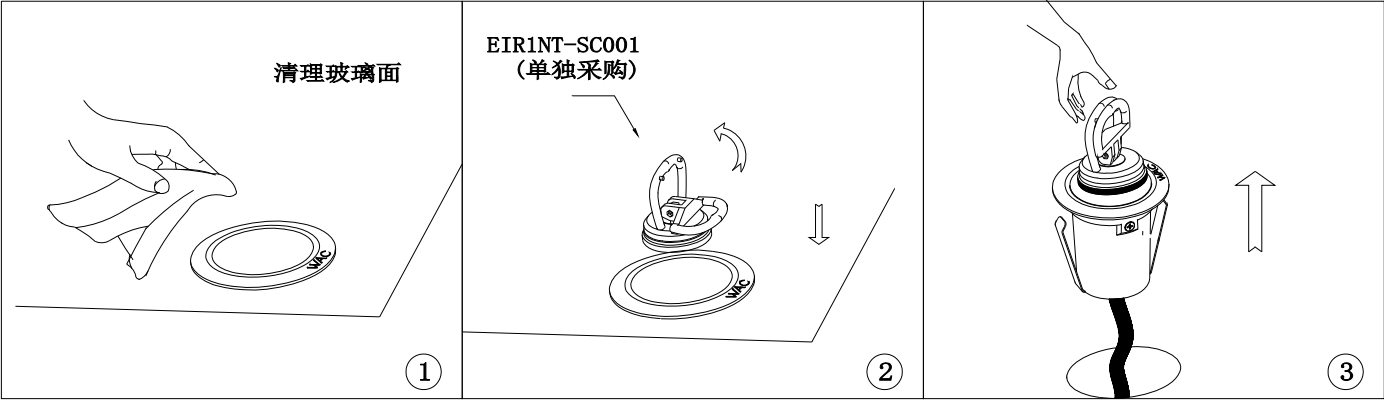

4、接线说明：

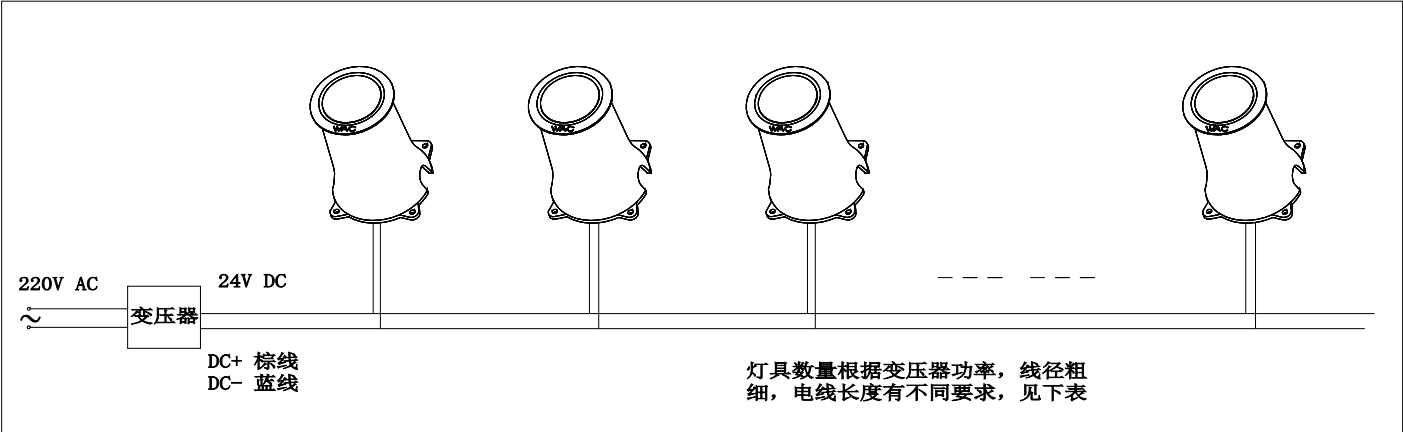


5、变压器、线径与灯具串接数量参考下表（灯具功率3.5W）：


序号	变压器功率(W)	线径(mm ²)	电线长度(m)	建议串接灯具数量(个)
1	100	1.0	50	20
2	100	1.0	40	22
3	100	1.0	30	24
4	100	1.0	20	26
5	100	1.0	10	28

注：1、表格中变压器带载能力为100%，若带载能力下降则按比例调整；
2、表中灯具连接数量计算方法说明：如变压器功率变为200W，其他数据不变，灯具串接数量为40个。

3. Repair

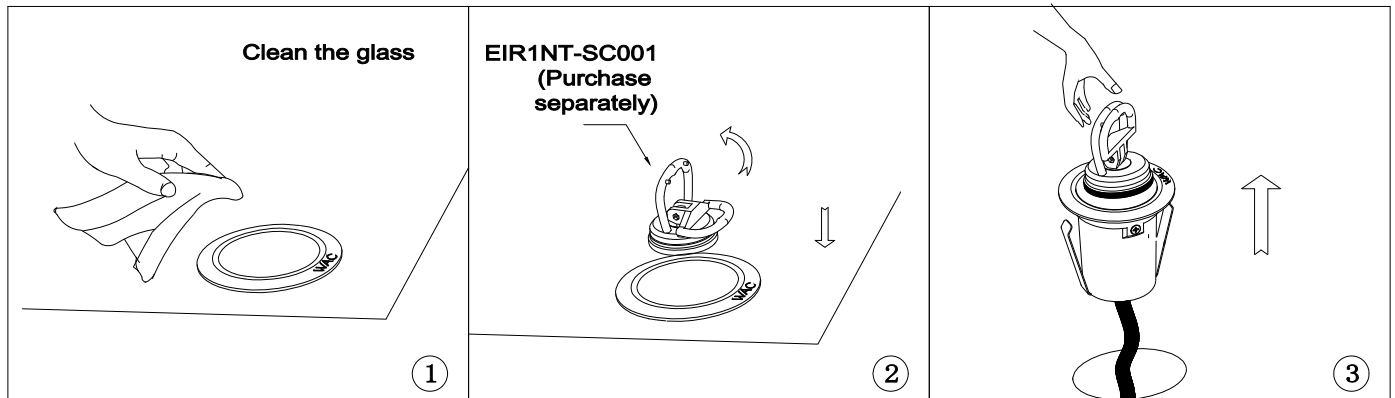

4. Wiring

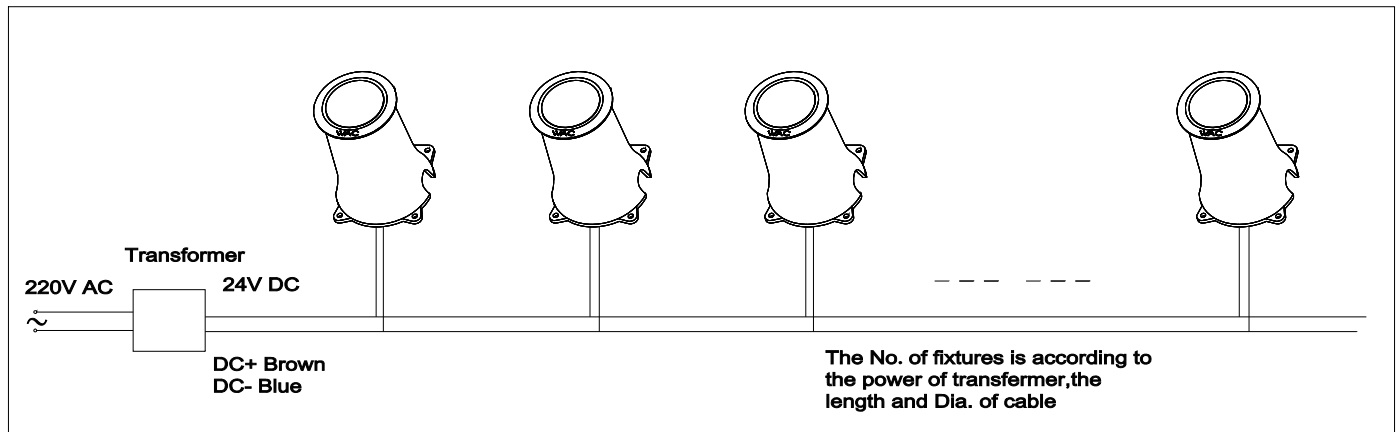

5. The relation of the fixtures' QTY. ,the transformer 's power, the length and Dia. of cable show as below:

Serial No	Power of trans (W)	Dia. (mm ²)	Length (m)	The QTY of fixtures (PCS)
1	100	1.0	50	20
2	100	1.0	40	22
3	100	1.0	30	24
4	100	1.0	20	26
5	100	1.0	10	28

Note:

- The transformer can full load at this sheet; the no. reduce according to the ability of transformer.
- The calculation about the QTY of fixture: the 40pcs fixtures can connect on a cable on one of the conditions:
The power is up to 200W; the Dia. Is up to 2.0 mm².