

LIGNE PRO - MODEL: LGAS6

Linear Luminaires

WAC LIGHTING

Responsible Lighting®


项目名称:

灯位号:

产品图片



线图

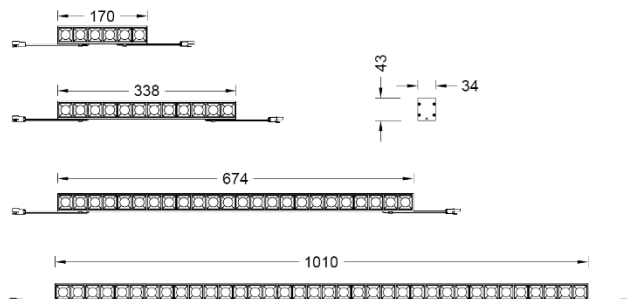

产品描述

吸顶式 Graze, 采用 SUBROSA 隐光技术, 具备多种配光, DC24V 输入, 可首尾相接。适用于酒店及商业公区的暗槽安装式线性洗墙应用。

产品特性

- 主体材质: 铝合金挤出灯身
- 光学系统: 透镜+SUBROSA 隐光系统
- 表面处理: 静电粉末喷涂
- 投射方向: /
- 配件/支架: /
- 安规认证: CQC
- 防护等级: IP20
- 绝缘等级: Class III
- 环境温度: -20°C~40°C

产品规格

- 开孔尺寸: /
- 天花厚度: /
- 遮光角: 35°
- 光源类型: SMD LED
- 光源光通量: 1600lm@18W/m; 2600lm@30W/m
- 光源寿命: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- 色温/显指: 2700K / 3000K / 4000K, Ra90
- 光源色容差: 3 SDCM
- 输入电压: 24V DC
- 调光控制: 用户自配调光模块
- 产品重量: 约 1.3Kg/m, 不含包装

订购模型

Model	Sys. Power	LED Num.	Length	Driver	Beam	CCT	Reflector	Finish
LGAS6	18 18W/m	06 6 pcs	170mm	N No Driver	E 22°x44°	27 2700K	B Black	BK Black
Linear Graze	30 30W/m	12 12 pcs	338mm		1 16°	30 3000K		WT White
A series		24 24 pcs	674mm		2 22°	40 4000K		
Surface mounting		36 36 pcs	1010mm		3 33°			
					4 44°			

示例: LGAS6-3036N-230BBK

配件

/

WAC Lighting
www.waclighting.com (US)
www.waclighting.com.cn (China)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)
14,Lane 299, Bi Sheng Road,Shanghai 201204
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

WAC Lighting 保留对产品进行不定期设计更新的权利。2021-03-12

LIGNE PRO - MODEL: LGAS6

Linear Luminaires


WAC LIGHTING

Responsible Lighting®


项目名称:

灯位号:


配光曲线@3000K数据




型 号:	LGAS6-1836N-E30BBK	LGAS6-3036N-E30BBK
光 束 角:	22°x44°	22°x44°
系统功率:	18 W/m	30 W/m
系统光通量:	1002 lm	1566 lm
中心 光强:	2509 cd	3920 cd
系统 光效:	56 lm/W	52 lm/W



型 号:	LGAS6-1836N-130BBK	LGAS6-3036N-130BBK
光 束 角:	16°	16°
系统功率:	18 W/m	30 W/m
系统光通量:	1178 lm	1840 lm
中心 光强:	5419 cd	8467 cd
系统 光效:	65 lm/W	61 lm/W



型 号:	LGAS6-1836N-230BBK	LGAS6-3036N-230BBK
光 束 角:	22°	22°
系统功率:	18 W/m	30 W/m
系统光通量:	1210 lm	1891 lm
中心 光强:	4489 cd	7014 cd
系统 光效:	67 lm/W	63 lm/W



型 号:	LGAS6-1836N-330BBK	LGAS6-3036N-330BBK
光 束 角:	33°	33°
系统功率:	18 W/m	30 W/m
系统光通量:	1213 lm	1895 lm
中心 光强:	2893 cd	4521 cd
系统 光效:	67 lm/W	63 lm/W

LIGNE PRO - MODEL: LGAS6


Linear Luminaires

WAC LIGHTING

Responsible Lighting®

项目名称:

灯位号:



型 号:	LGAS6-1836N-430BBK	LGAS6-3036N-430BBK
光 束 角:	44°	44°
系统功率:	18 W/m	30 W/m
系统光通量:	940 lm	1469 lm
中心 光强:	1507 cd	2354 cd
系统 光效:	52 lm/W	49 lm/W